





Specification for temporary Pitch View Studios (PVS)


Fix installed studios must fulfil these specifications as a minimum standard:


- The PVS shall be new, or "as good as new", without any traces of wear and 100% odourless;
- Each 4m wide to 5m deep, 2.3m height (inside usable space);
- Waterproof, stable and certificated up to wind speed 12, outside neutral and uniform color;
- Heavy flammable according to European regulation and with certificates for all materials;
- Laminated safety glass (LSG, 16mm), 4m wide (4 pieces each 1mx3m / glass front with minimum 2.3m clear height); frameless, joint-to-joint mounted; glass front installed with a vertical off-axis angle (chamfered to minimize reflections at the front);
- Grid for mounting light or other TV equipment;
- Sound protected wood-walls and roof, all with carpet (neutral, dark and uniform color, floor also with carpet);
- Sound level absorption of 18 dB (A) and 6 dB (C) required;
- One flexible door at each PVS (left or right door stop);
- Jointless and vibration-free floor, with footfall sound insulation;
- Air-conditioning with min. 10KW cooling capacity, split units with low-noise air handler inside the Pitch View Studios;
- Emergency exit light;
- Outside 'on-air' light;
- Basements of the PVS (5,3m x 4,3m including support basements) must be vibration-free (standard scaffolding construction with additional bracing (if needed); plain and smooth floor (e.g. Layher Event System);
- Special scaffolds will be constructed according to relevant, verified and certificated standards and must comply with European health & safety regulations;
- PVS standing next to each other must be 100% decoupled (sound and vibration, means studio and basements decoupled).

Examples:






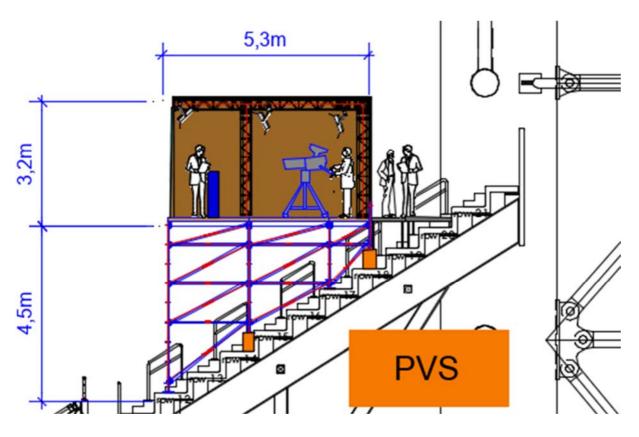

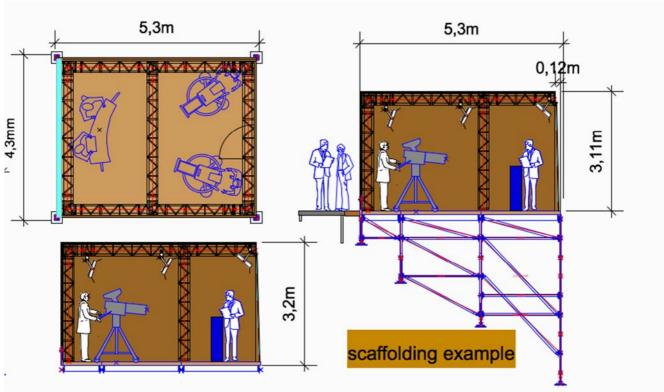



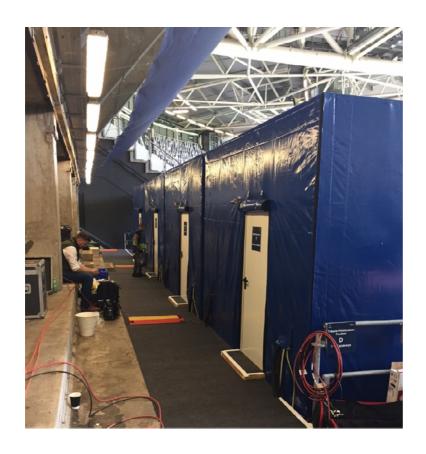

UEFA TECH_HIC_12 SEPT 2019





UEFA
ROUTE DE GENÈVE 46
CH-1260 NYON 2
SWITZERLAND
TELEPHONE: +41 848 00 27 27
TELEFAX: +41 848 01 27 27
UEFA.com

WE CARE ABOUT FOOTBALL